

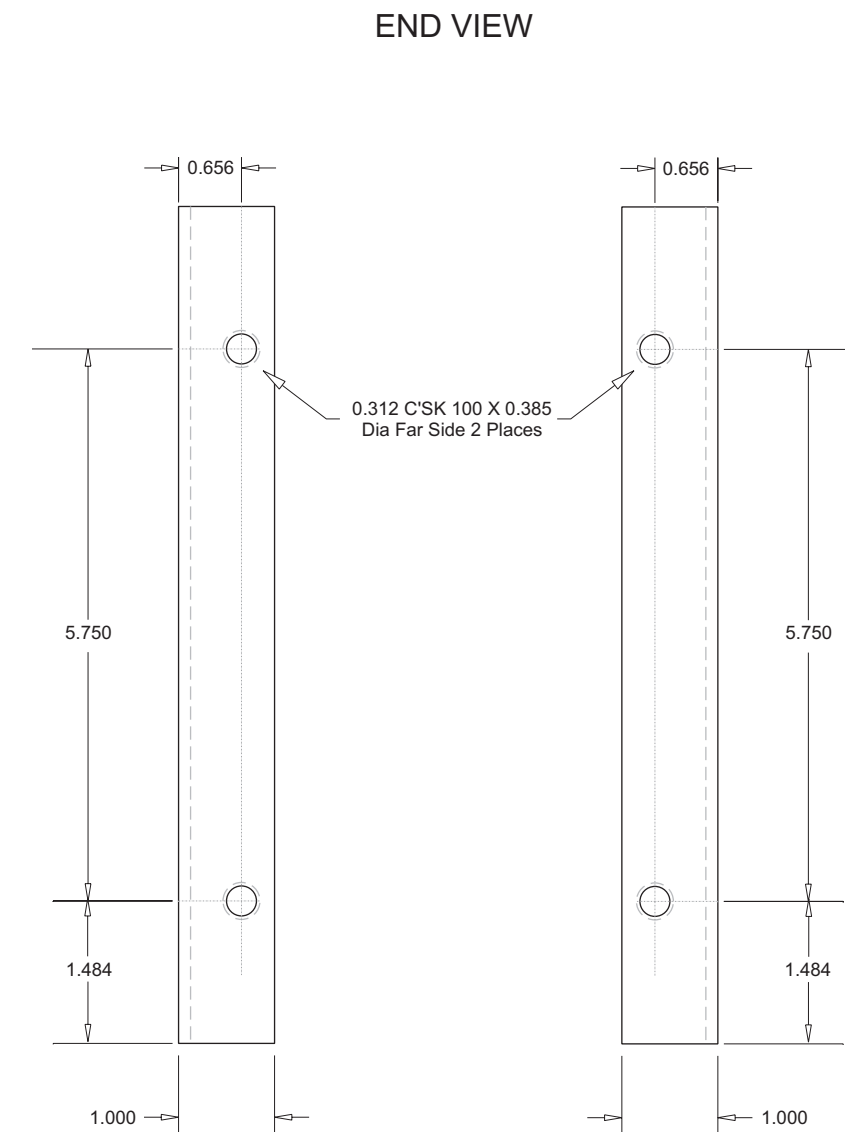
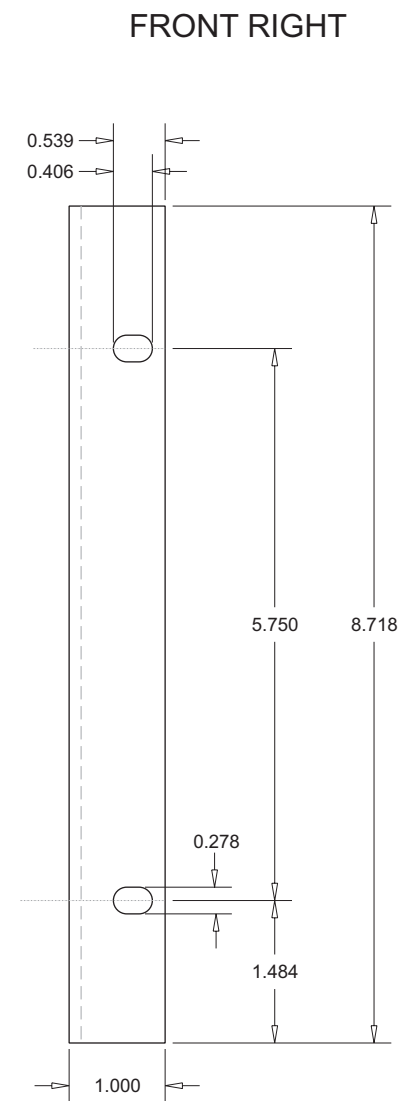
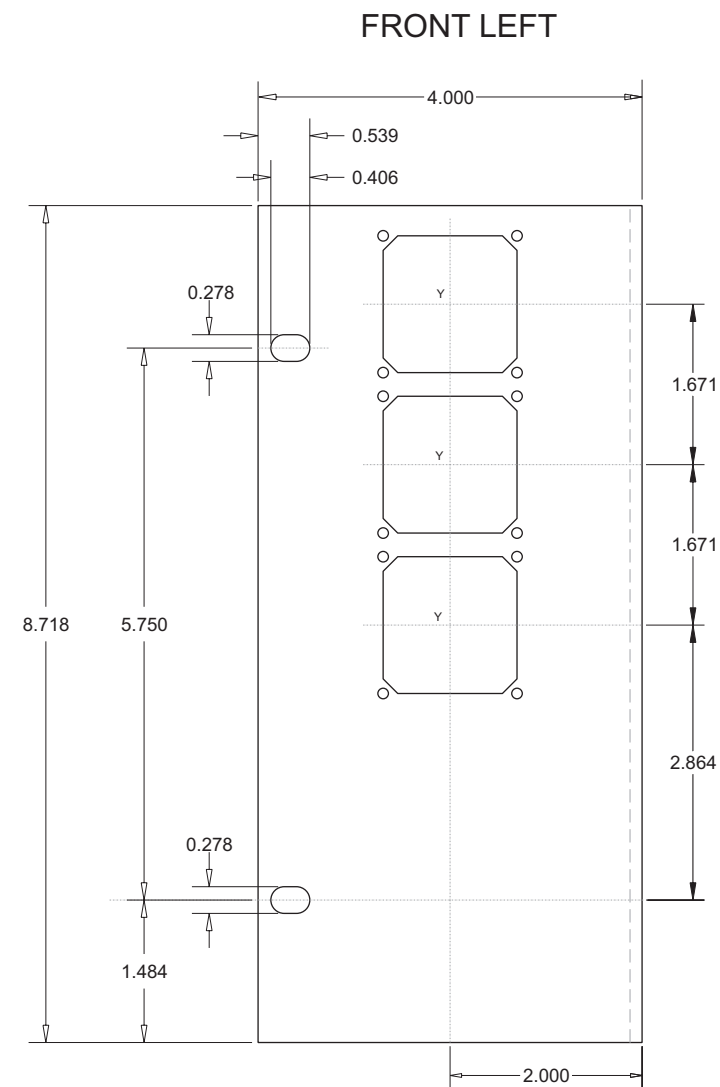


Flat Head Phillips
10-32 x 3/8, 100° 4 Places

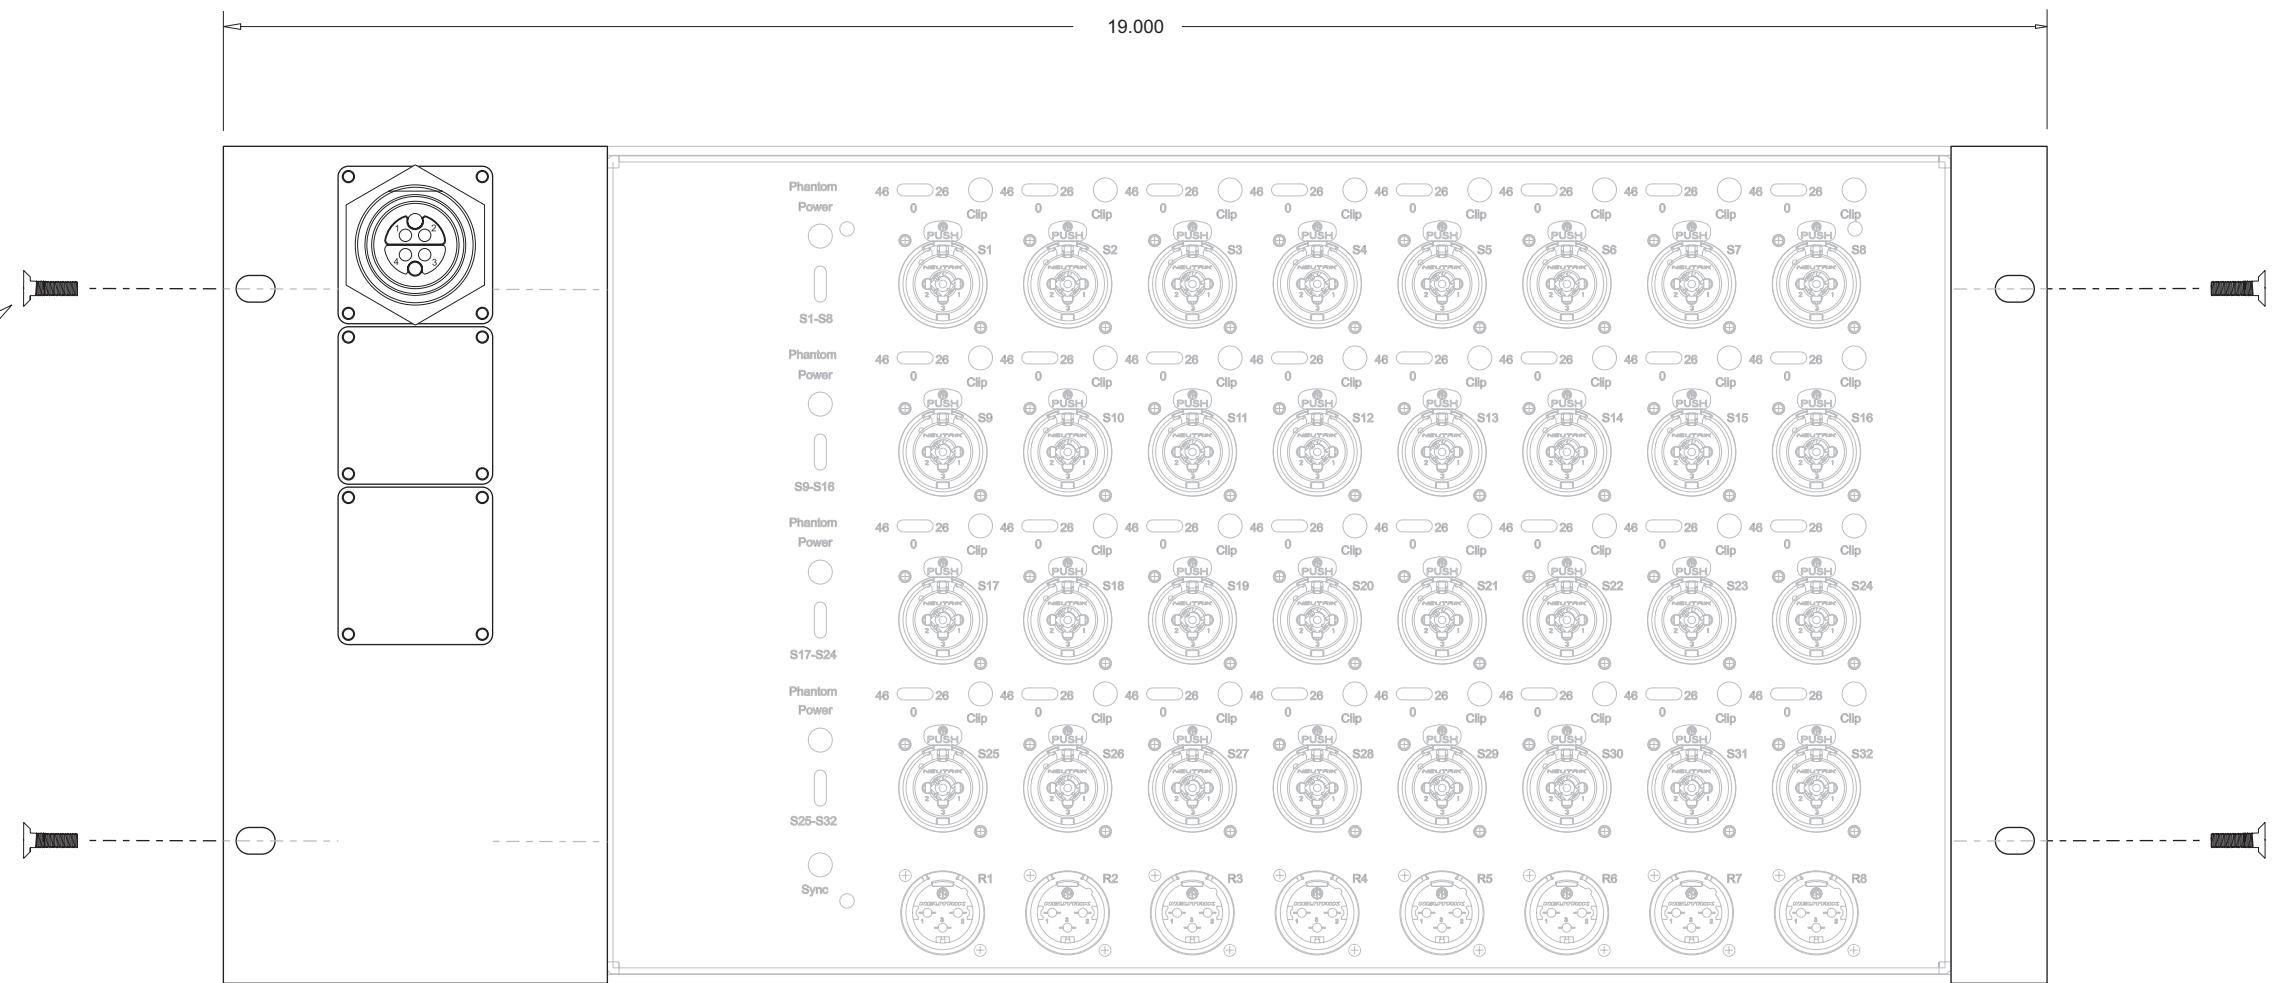


Shown Configured
VER-1832-T1


Optional Optical Plates

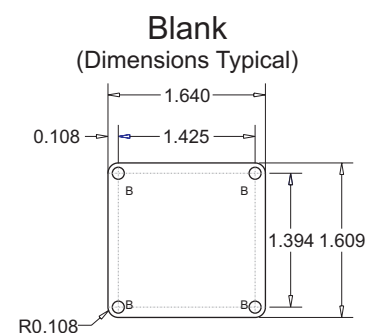


TAC-4 JR




TAC-4 FR




OpticalCon




1 ST




2 ST



3 ST



4ST



HOLE DATA	
DESIG	DESCRIPTION
A	3/8-24 THD
B	0.125 DIA
C	4-40 THD
D	1.125 DIA
E	0.938 DIA
F	1.250 X1.188 D HOLE

UNLESS OTHERWISE SPECIFIED

DIMENSIONS IN INCHES
TOLERANCES:
FRACTION $\pm 1/64$
XX ± 0.10
X.XXX ± 0.005
ANGLES

MATERIAL: 0.125 Aluminum Type 50/52 H32
FINISH: PAINT BLACK

ENGR.	HSO III	DATE:	2/14/2006
DRAWN	HSO III	DATE:	2/14/2006
REVIEW		DATE:	
CHECKED		DATE:	



10840-412 Guilford Rd.
Annapolis Junction, MD 20701
301-604-0100
Fiberflex.com

VER-1832, Final Assembly

FSCM:	E	117098	REV: -
SCALE: 1:1	SHEET 1	OF 1	